



(1)

STANDARD SCOPE
OF DELIVERY

- Solid cast iron base with cast iron grid
- Solid cast iron door
- Solid cast iron wood storage door
- Possibility for external combustion air connection comes as standard

Please order the connecting piece for external air connection separately.

Air flow bar handle with
Snap lock system




Solid cast iron wood
storage door



Vermiculite firebox and
cast iron grid



Mino Top 2.0, steel black

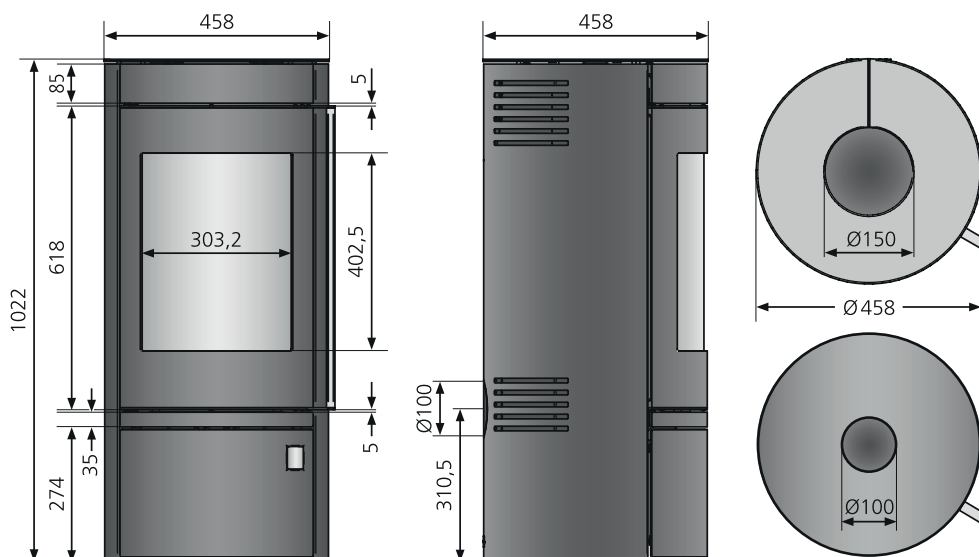

Available design		Order no.	EAN-Code
Mino Top 2.0, steel black		4815 50	4250340909556
Optional accessories		Order no.	EAN-Code
Connecting piece for combustion air supply		9200 69	4029807779991
Rotating tray steel black, Ø 460 mm (for top connection)		9214 72	4029808539426
Energy efficiency class		A+	
Connection possibility		top	
Operation with external air supply		rear / bottom	
Nominal heat output	kW	5,5	
Weight (incl. packaging)	ca. kg	115	
Room heating capability	m³	88	
Length of logs	cm	25	
Exhaust gas mass flow	g/s	5,2	
Exhaust gas temperature	°C	295	
Required discharge pressure	mbar	0,12	